
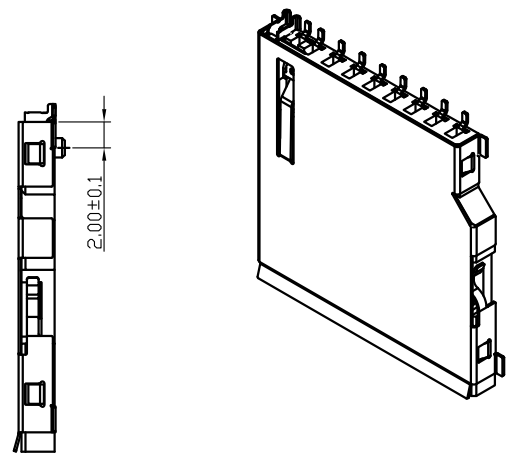


REV.	ECN.NO.	APPD.
A0	/	/

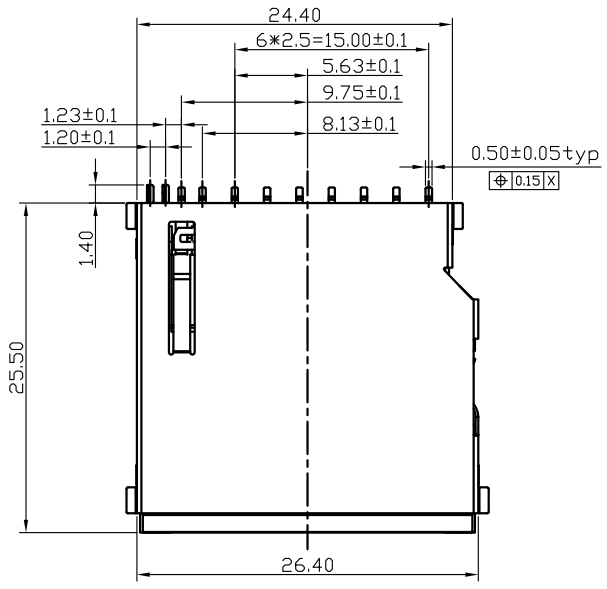

\*Electrical Characteristics:  
 Contact Current Rating:0.5 Amperes.  
 Dielectric Withstanding Voltage:AC500V r.m.s.  
 Insulation Resistance:1000 MΩ Minimum.  
 Contact Resistance:100 mΩ Maximum.

\*Environmental:  
 Operating Temperature:-25°C~+90°C.



\*Environmental:  
 Mating Cycles:5000~10,000 Insertions.

\*Mechanical Characteristics:  
 Card Push Insertion/Out Force:1.4kgf. MAX  
 Contact Separation Force:0.20kgf Minimum.

\*Material:  
 Insulator:HI-Temp Plastic UL 94V-O Rated.  
 Contact:Copper Alloy(t=0.15mm).  
 Shell:Stainless Steel(t=0.20mm).  
 Spring:SWP.

SD5211-060-GBR

G: 半金G/Fu  
 R: RoHS  
 B: LCP米黄色

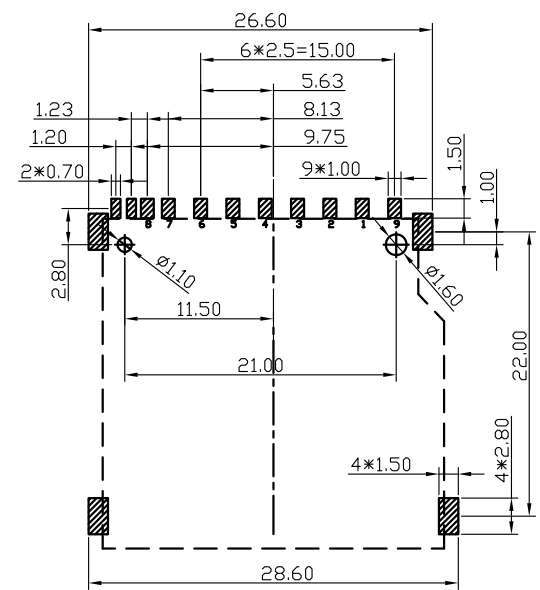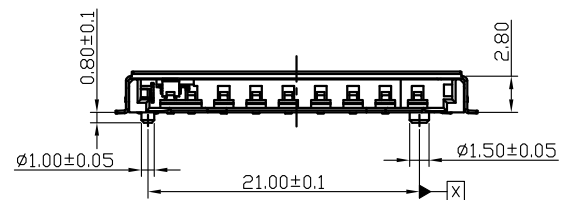

RECOMMENDED P.C.B HOLE LAYOUT  
 COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司				
.XXX ±0.10		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.				
.XX ±0.20		.X ±3'				
.X ±0.30		.XX ±2'				
APPROVED		PART NAME:	SD CARO 卡座-SD 长卡			
CHECKED		PART No:	SD5211-060-GBR			C
DRAWN	chenyiting	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2023.04.19		mm	1:1	10F1	A0