


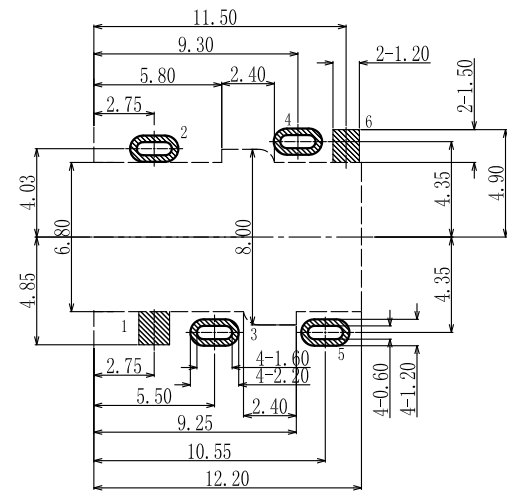
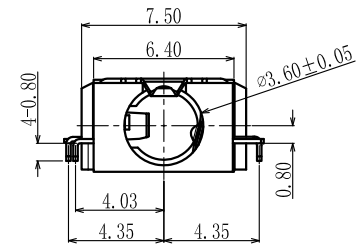
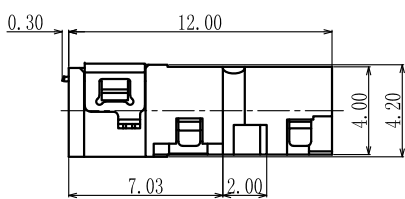


REV.	ECN. NO.	APPD.
A	/	/

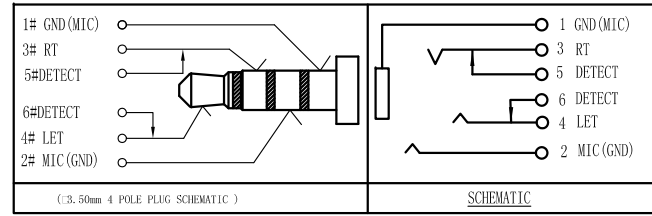

3D VIEW





P.C.B LAYOUT TOP VIEW

- CURRENT RATING : 1.0 AMP. MAX.
- DIELECTRIC WITHSTANDING : AC 500V/min R.M.S.
- INSULATION RESISTANCE : 100MΩ min. AT 100V DC.
- CONTACT RESISTANCE : 50mΩ MAX.
- OPERATING TEMPERATURE : -25° C TO +85° C.
- DURABILITY : 1500 CYCLES.
- MATING FORCE : 3kgs MAX
- UNMATING FORCE : 0.3~3.0kgs
- MAX PROCESSING TEMPERATURE : 60 SECONDS IN 230° C AND 10 SECONDS IN 260° C

JK1-158-G217

G:半金G/Fu”  
2:PBT  
1:黑色

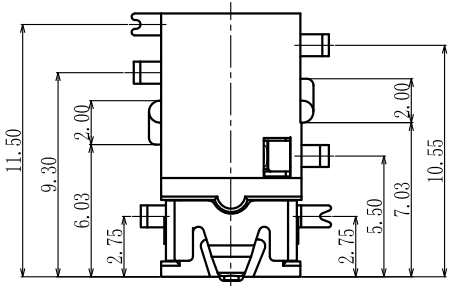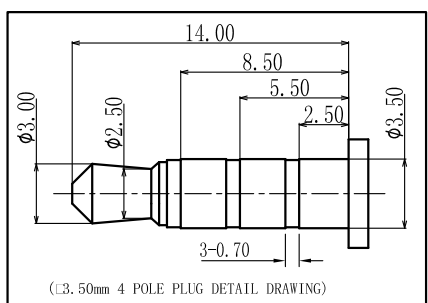

7	HOUSING	HIGHT TEMPERATURE PLASTIC COLOR BLACK	
6	CONTACT 6#	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA	T=0.20mm
5	CONTACT 5#	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA	T=0.20mm
4	CONTACT 4#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
3	CONTACT 3#	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA	T=0.20mm
2	CONTACT 2#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
1	CONTACT 1#	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON OVERALL;	T=0.20mm
NO.	DESCRIPTION	MATERIAL	REMARK

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>FLW</b> 深圳市华联威电子科技有限公司			
.XXX ±0.10		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.			
.XX ±0.20		.X° ±3°			
.X ±0.30		.XX° ±2°			
APPROVED		PART NAME:	耳机沉板0.8		
CHECKED		PART No:	JK1-158-G217		C
DRAWN	weihong	PROJECTION:	UNIT:	SCALE	SHEET
DATE	2021.9.23		mm	1:1	10F1
					REV.
					A