



REV.	ECN.NO.	APPD.
A	/	/



单排 1\*NNP





双排 2\*NNP

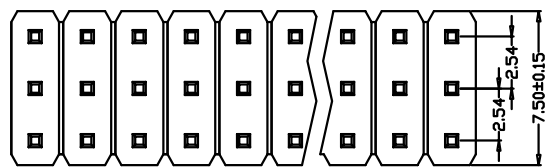

三排 3\*NNP


材质  
 塑胶 :PA6T/LCP-UL94 V-0  
 端子 :黄铜  
 接触电镀:镀金 Gold flash

产品参数  
 额定电流 : 3A  
 耐电压值: ≤550V AC  
 工作温度:-40° C to +105° C  
 接触电阻: ≤20mΩ  
 绝缘电阻: ≥1000MΩ  
 最大处理温度: 230° C-265° C

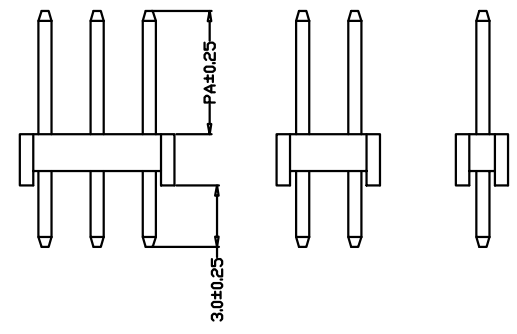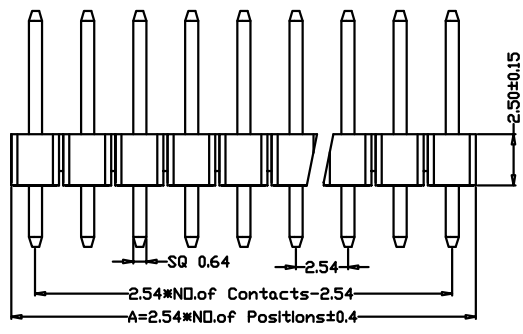

216104-1039-G31058

- 1:吸塑盘
- 2:吸塑管
- 5:袋装
- 7:管装

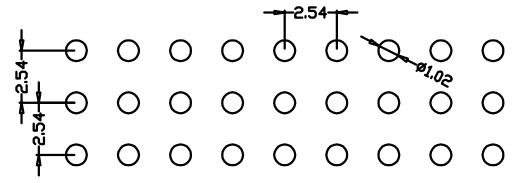

P. C. B LAYOUT

A	PA	
2P-40P	2.0-20.0	

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>FLW</b> 深圳市华联威电子科技有限公司				
.XXX ±0.10 .XX ±0.20 .X ±0.30		.X' ±3' .Xx' ±2'		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.		
APPROVED		PART NAME:	2.54间距排针 直针 21 PIN 3排			
CHECKED		PART No:	216104-1039-G31058	C		
DRAWN	weihong	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2021.9.23		mm	1:1	10F1	A