


REV.	ECN.NO.	APPD.
A	/	CJH

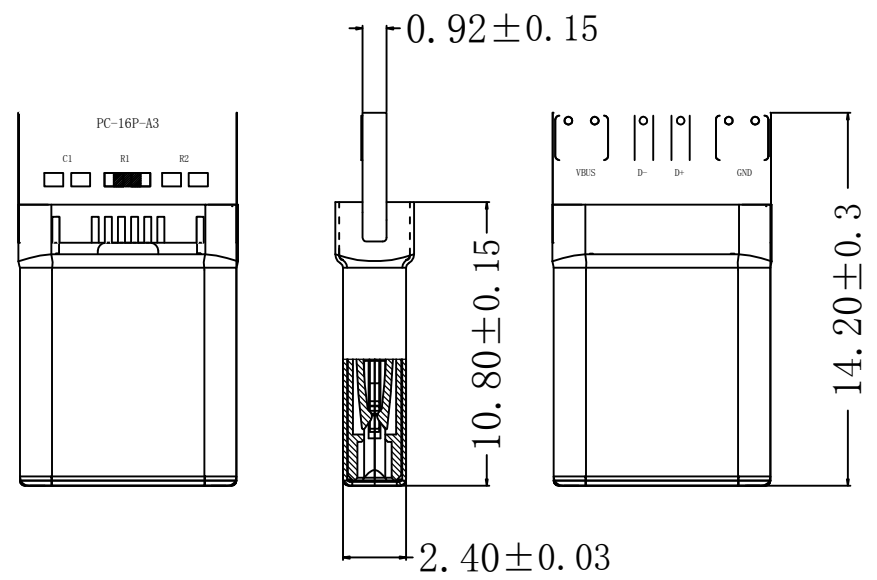

NOTES:



1.MATERIAL:

- Housing:thermoplastic plastics
- terminals:Copper Alloy
Gold plated in contact area:
Tin plated in termination
Nickel Plated overall
- Shell:Steel&Copper Alloy
Nickel/Au Plated overall

2.characteristics:

- Rating Voltage : 30V AC.
- Rating Current:
5A for Vbus PIN;1.25A for Vconn PIN
- Contact Resistance:40 mΩ MAX.
- Insulation Resistance:100 MΩ MIN.
- Withstanding Voltage:AC 100V
- Mating force: 5~20N MAX
- Extraction force:8~20N Min
- Life test:10000Cycles MIN.
- Temperature Range: -30℃~+80℃.

The product must be compliance ROHS

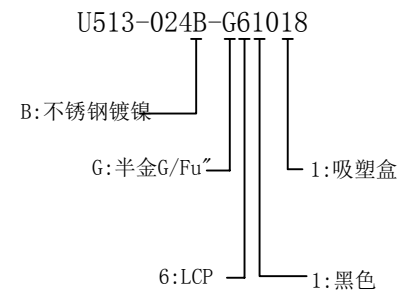

USB AM	线色	TYPE C
1	VBUS 红色	A4, A9, B4, B9
2	D- 白色	A7
3	D+ 绿色	A6
4	GND 地线	A1, A12, B1, B12
	CC	A5
外壳	DRAIN 地线+编织	外壳+卡勾



TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司			
.XXX ±0.10 .XX ±0.20 .X ±0.30		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.			
APPROVED		PART NAME:	TYPE C 16P拉伸带PCB板四芯公头		
CHECKED		PART No:	U513-024B-G61018	C	
DRAWN	陈建辉	PROJECTION:	UNIT:	SCALE:	SHEET
DATE	2022.09.29		mm	1:1	10F1
					REV. A