



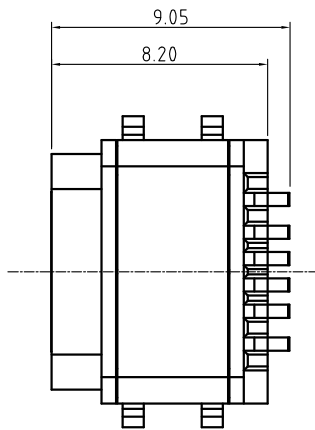
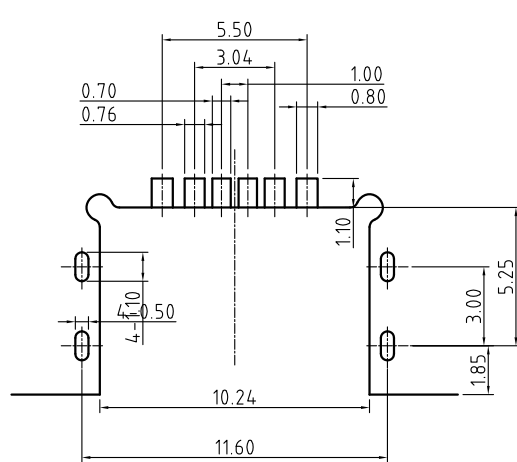
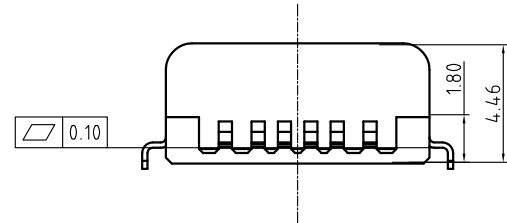



REV.	ECN.NO.	APPD.
A	XXXXXXXXXX	yangguifeng




NOTES:
 1.MATERIAL:
 1.1 Housing:thermoplastic plastics
 1.2 terminals:Copper Alloy
 Gold plated in contact area:
 Tin plated in termination
 Nickel Plated overall
 1.3 Shell:Steel&Copper Alloy
 Nickel/Au Plated overall
 2.characteristics:
 2.1 Rating Voltage : 30V AC.
 2.2 Rating Current:
 5A for Vbus PIN;1.25A for Vconn PIN
 2.3 Contact Resistance:40 mΩ MAX.
 2.4 Insulation Resistance:100 MΩ MIN.
 2.5 Withstanding Voltage:AC 100V
 2.6 Mating force: 5~20N MAX
 2.7 Extraction force:8~20N Min
 2.8 Life test:10000Cycles MIN.
 2.9 Temperature Range: -30℃~+80℃.
 The product must be compliance ROHS

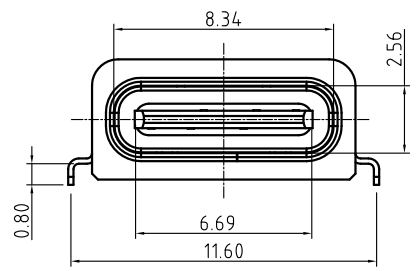

U572-651B-G91018
 B: 不锈钢镀镍
 G: 半金G/Fu
 1: 吸塑盒
 1: 黑色
 9: PA10T

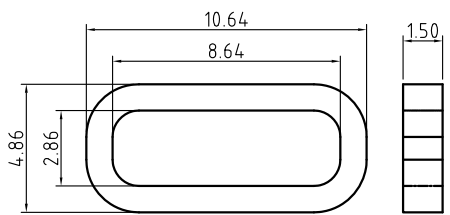

建议胶圈尺寸

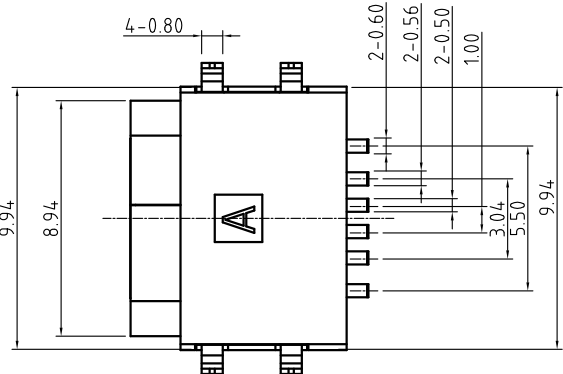

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司			
.XXX ±0.10 .XX ±0.20 .X ±0.30		.X ±3' .XX ±2'		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO	
APPROVED		PART NAME:	TYPE C 6P 沉板四脚插防水6级		
CHECKED		PART No:	U572-651B-G91018		C
DRAWN	yangguifeng	PROJECTION:	UNIT:	SCALE:	SHEET:
DATE	2021.12.01		mm	1:1	1 OF 1

A5	CC1	B12	GND	3	Shell	1	SUS304R-1/2H Ni PlatingT=0.25mm
A9	VBUS	B9	VBUS	2	Contact	6	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm
A12	GND	B5	CC2	1	Housing	1	PA10T (G.F30%)
PIN	SIGNAL NAME	PIN	SIGNAL NAME	ITEM	PART NAME	Q' TY	FINISH