
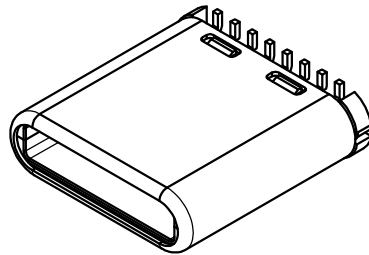


REV.	ECN.NO.	APPD.
A	/	ZFY

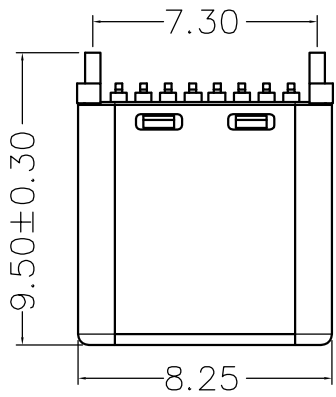




备注:

1. 材质:

- 1.1 胶芯: LCP+30%G.F UL94V-0
- 1.2 端子: C2680, T=0.20mm; 镀半金锡
- 1.3 外壳: 不锈钢, T=0.15mm; 表面镀镍
- 1.4 卡钩: 不锈钢, T=0.40mm; 表面镀锡



2. 主要特性:

- 2.1 额定电流: 3A
- 2.2 接触阻抗: 40mΩ MAX
- 2.3 绝缘阻抗: 100MΩ MIN 250V DC
- 2.4 耐压测试: 100V AC
- 2.5 沾锡性: 温度250±5℃
- 2.6 整体插入力: 2.0kgf MAX  
整体拔出力: 0.8kgf MIN
- 2.7 使用寿命: 10000次
- 2.8 工作温度: -30℃~+80℃

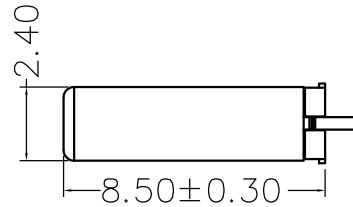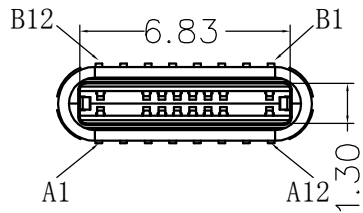

U573-408B-G61038

- 1: 盘装
- 1: 黑色
- B: 不锈钢镀镍
- G: 半金G/Fu
- 6: LCP

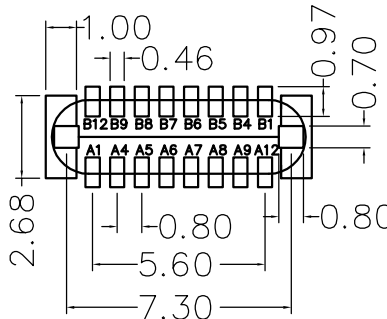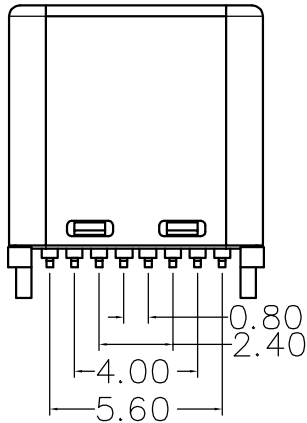

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>HLW</b> 深圳市华联威电子科技有限公司			
.XXX ±0.15	X* ±5°	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.			
.XX ±0.20	.XX* ±2°				
X ±0.30					
APPROVED		PART NAME:	USB TYPE C 拉伸磁吸贴片 卡钩7.25		
CHECKED		PART No:	U573-408B-G61018	C	
DRAWN	ZhangFenYan	PROJECTION:	UNIT:	SCALE	SHEET
DATE	2018.10.10		mm	1:1	10F1
					REV. A