

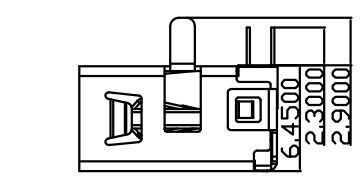






REV.	ECN.NO.	APPD.
A	/	pcy

- NOTES:
- MATERIAL:
    - Housing:thermoplastic plastics
    - terminals:Copper Alloy  
Gold plated in contact area:  
Tin plated in termination  
Nickel Plated overall
    - Shell:Steel&Copper Alloy  
Nickel Plated overall
  - ELECTRICAL CHARACTERISTICS:
    - Rating Current :1.5 Ampere
    - Rating Voltage :30 V Max
    - Contact Resistance:30 Milli ohms
    - Insulation Resistance:1000 Mega ohms Min.
  - MECHANICAL CHARACTERISTICS:
    - Connector Mating force: 35N MAX(3.57KgF)
    - Connector Unmating force:10N min(1.02KgF)
    - Durability:1500Cycles.
  - ENVIRONMENT CHARACTERISTICS:
    - Operating temperature:-0°C to +50°C
    - Storage temperature:-20°C to +60°C

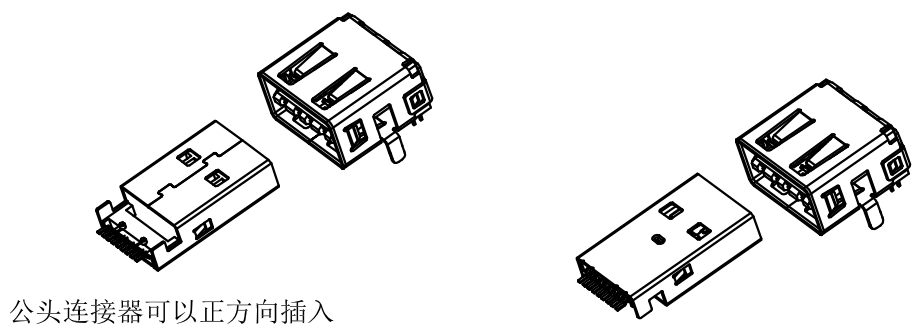

U221-3435-G61018

5: 铜壳镀镍  
G: 半金G/Fu”  
1: 吸塑盒  
1: 黑色  
6: LCP

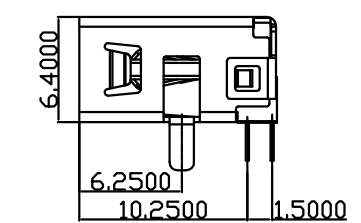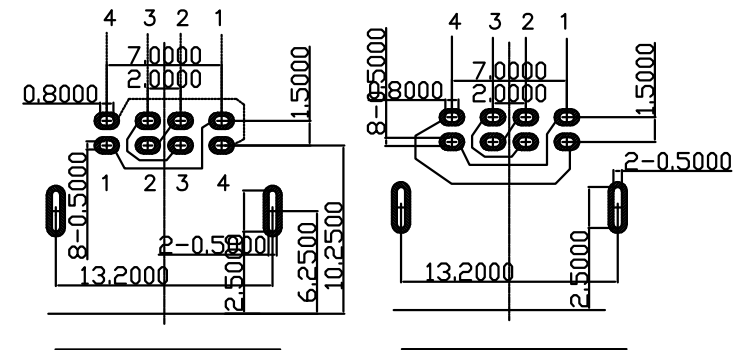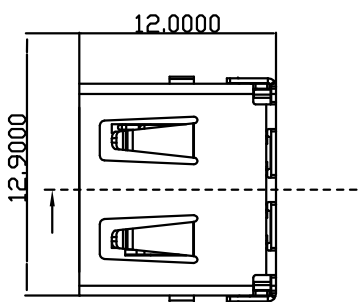

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>FLW</b> 深圳市华联威电子科技有限公司			
.XXX ±0.10 .XX ±0.20 .X ±0.30		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.			
APPROVED		PART NAME:	USB AF 90度 双面插 无卷边		
CHECKED		PART No:	U221-3435-G61018	C	
DRAWN	Shen	PROJECTION:	UNIT:	SCALE	SHEET
DATE	2021.09.01		mm	1:1	10F1
					REV. A