
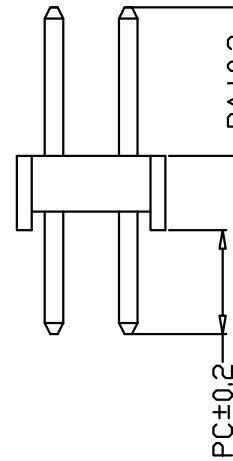
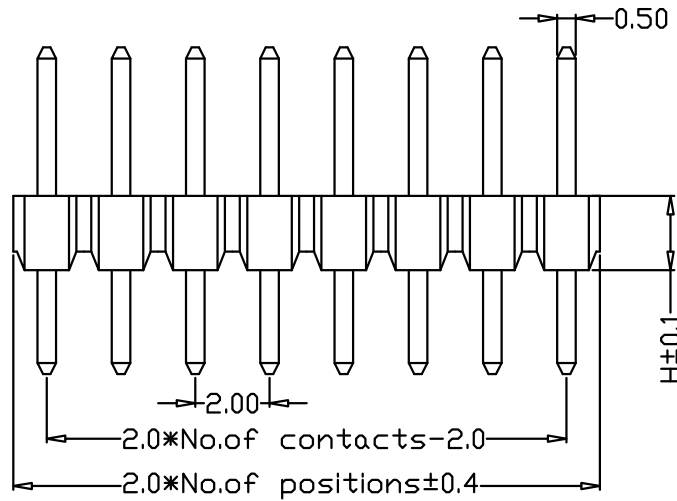
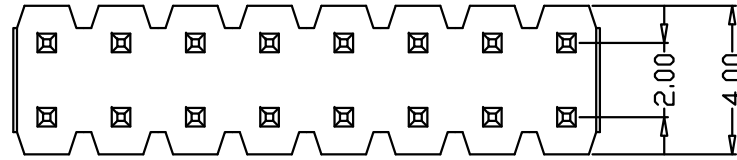



REV.	ECN.NO.	APPD.
A	/	/

技术指标 (Technical Index) :

1. 工作温度 (Temperature range) :  $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ .
2. 额定电压 (Rated voltage) : 250V DC/AC (rms)
3. 额定电流 (Rated current) : 5A AC, DC
4. 接触阻抗 (CONTACT Resistance) :  $\leq 25\text{M}\Omega$
5. 耐压值 (Withstanding voltage) : 1500V AC/minute
6. 绝缘阻抗 (Insulation resistance)  $\geq 1000\text{M}\Omega$

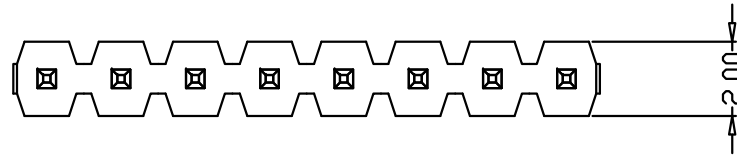

216104-1053-G31058  
 G: 半金G/Fu"  
 3: PA6T  
 1: 黑色

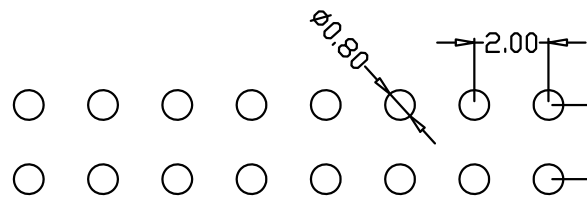

PCB. LAYOUT

A	H		PC	PA
2P-40P	1.5	2.0	1.5~3.0	2.0~10.0

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>FLW</b> 深圳市华联威电子科技有限公司			
.XXX ±0.10	.XX ±0.20	.X ±0.30	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO; LTD.		
.XX ±0.10	.X ±0.20	.XX ±0.30			

APPROVED		PART NAME:	2.0间距排针双排直插2X8P			
CHECKED		PART No:	216104-1053-G31058			C
DRAWN	chenyiting	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2022.04.12		mm	1:1	10F1	A