


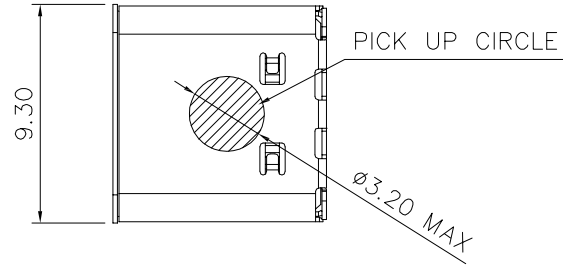




REV.	ECN.NO.	APPD.
A	/	ZFY

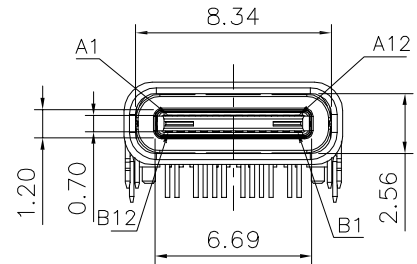

SPECIFICATIONS:
 Contact current Rating:
 5 Amperes for A1/B1/A12/B12&A4/B4/A9/B9.
 0.25 Amperes other contacts
 Withstanding Voltage: AC 100V(RMS)
 Insulation resistance: 100Megohms Minimum.
 Contact Resistance: 40mΩ Max
 Durability Test: 10000 Cycles
 Mating Force: 5-20 Newtons
 Unmating Force: 8-20 Newtons.


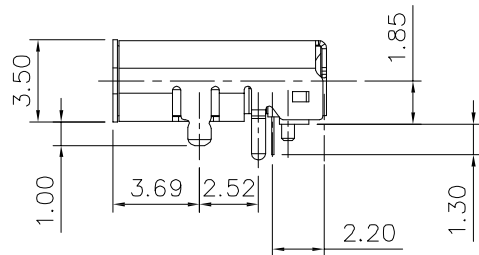


Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	VBUS	First	B9	VBUS	First
A5	CC1	Second	B8	SUB2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SUB1	Second	B5	CC2	Second
A9	VBUS	First	B4	VBUS	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL		GND	SHELL		GND

- U573-214X-XXX038
- 1: 铁壳镀镍
 - 5: 铜壳镀镍
 - B: 不锈钢镀镍
 - 1: 半金1u"
 - 3: 半金3u"
 - G: 半金G/Fu"
 - 1: 盘装
 - 3: 载带
 - 1: 黑色
 - 2: 白色
 - 3: 米黄色
 - 1: PA46
 - 2: PBT
 - 6: LCP

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司				
.XXX ±0.15 .XX ±0.20 .X ±0.30		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.				
APPROVED		PART NAME:	USB TYPE C 母座			
CHECKED		PART No:	U573-2145-X63038			C
DRAWN	Shen	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2021.09.01		mm	1:1	10F1	A

REV.	ECN.NO.	APPD.
A	/	ZFY

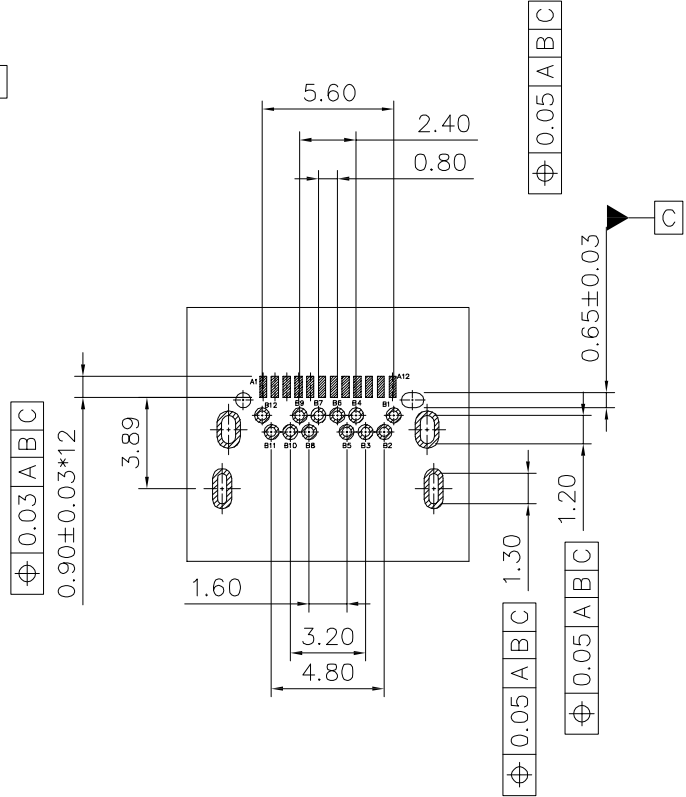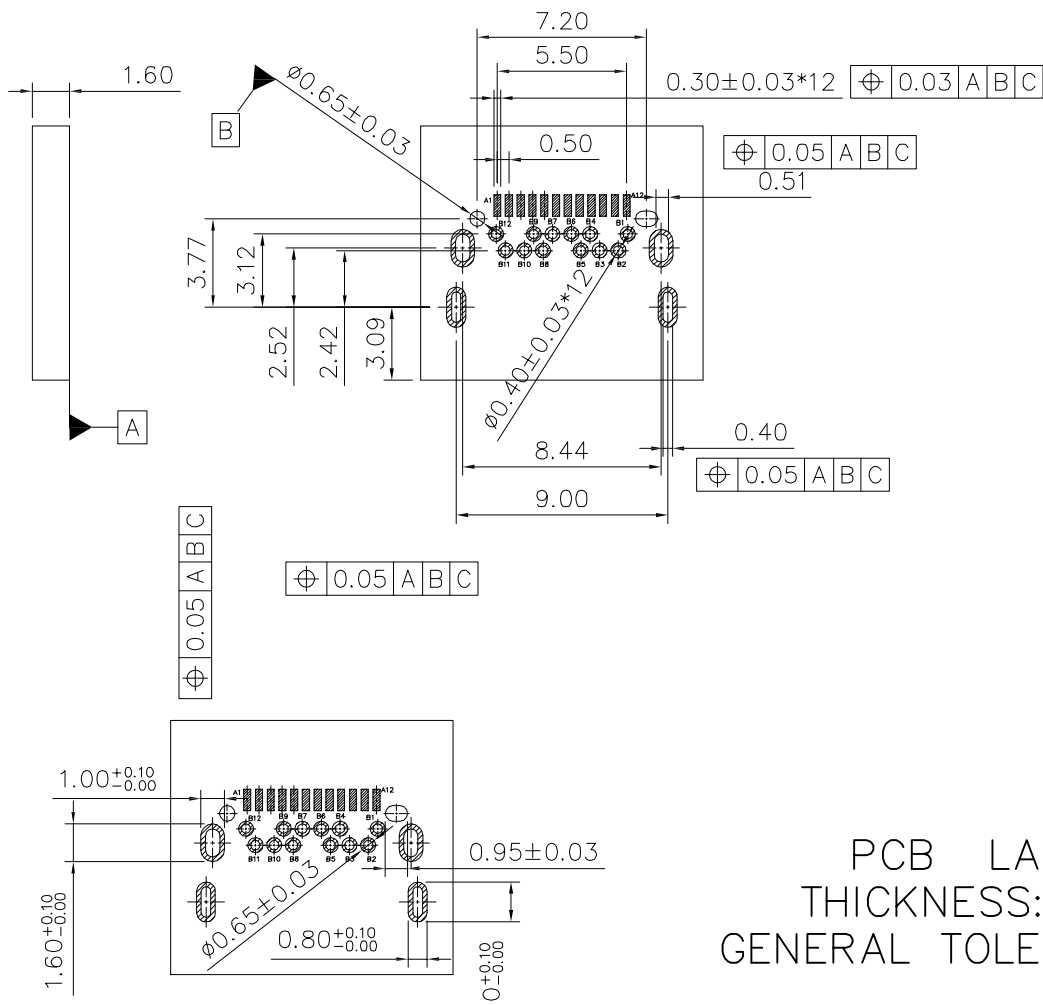

PCB LAYOUT
 THICKNESS: 1.60mm
 GENERAL TOLERANCE 0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司						
.XXX ±0.15	.X' ±5°	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.						
.XX ±0.20	.XX' ±2°	APPROVED	PART NAME:	USB TYPE C 母座				
.X ±0.30		CHECKED	PART No:	U573-2145-X63038	C			
		DRAWN	Shen	PROJECTION:	UNIT:	SCALE	SHEET	REV.
		DATE	2021.09.01		mm	1:1	10F1	A