

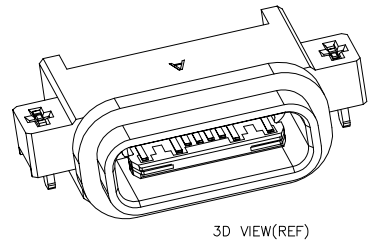
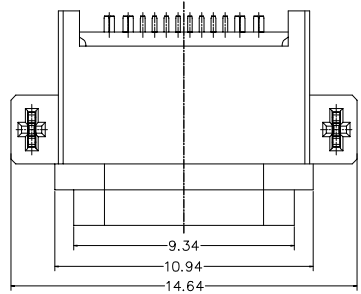
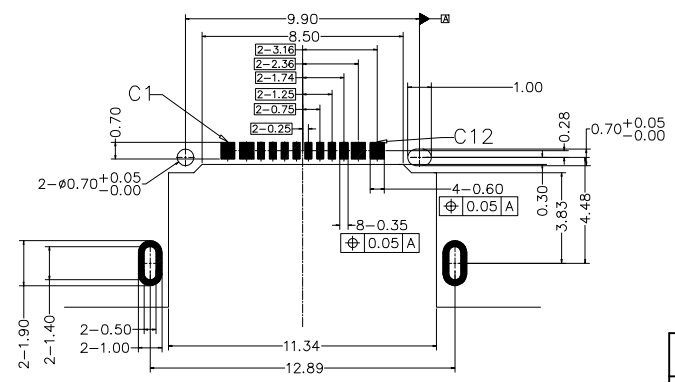
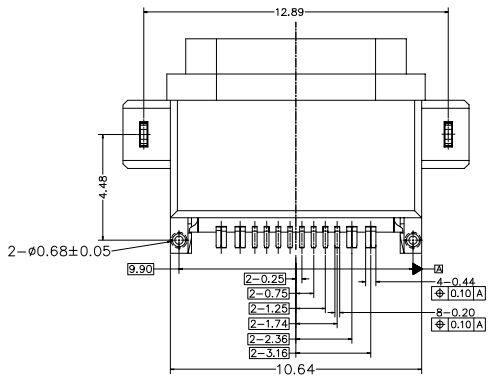
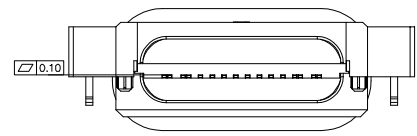


REV.	ECN.NO.	APPD.
A	/	/



- MAIN SPECIFICATION:
- VOLTAGE/CURRENT RATING: 5V/3.0 A
电流: 5V/3.0 A
 - DIELECTRIC WITHSTAND VOLTAGE: 100VAC
耐电压: 110V MAX
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
使用温度: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
电阻: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
绝缘阻抗: 100 MEGOHMS MIN.
 - INITIAL INSERTION FORCE 5-20N, EXTRACTON FORCE: 8-20N
初始插入力: 5-20N; 初始拔出力: 8-20N.
 - AFTER DURABILITY(10000CYCLES) INSERTION FORCE 5-20N
EXTACTION FORCE: 6-20N
寿命后 (10000次) 插入力: 5-20N; 拔出力: 6-20N.
 - WATERPROOF GRADE: IPX7
防水等级: IPX7.

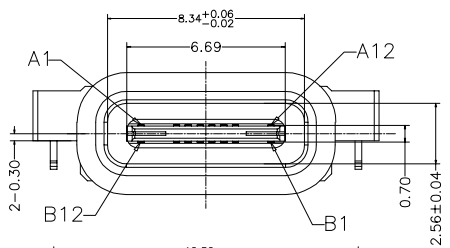

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

U578-1045-XXX0X8

- 6: 半金G/F
- 1: 半金1u"
- 3: 半金3u"
- 5: 半金5u"
- 8: 半金15u"
- 9: 镀全金1u"
- 1: 吸塑盒
- 3: 载带冷封
- 8: 载带热封
- 1: 黑色
- 2: 白色
- 3: 米黄色
- E: 蓝色300C-3
- 7: 蓝色300C
- 1: PA66
- 2: PBT
- 6: LCP

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.XXX ±0.10	.X' ±3'
.XX ±0.20	.XX' ±2'
.X ±0.30	

FLW 深圳市华联威电子科技有限公司
HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.

APPROVED		PART NAME:	TYPE C 16PIN			
CHECKED		PART No:	U578-1045-X61038			C
DRAWN	weihong	PROJECTION:	UNIT:	SCALE:	SHEET:	REV.:
DATE	2021.7.23		mm	1:1	10F1	A