
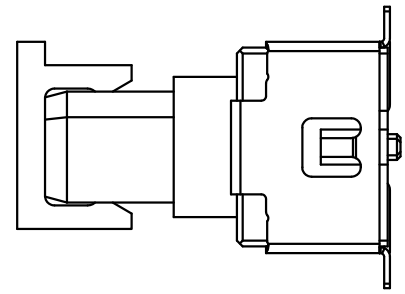


REV.	ECN.NO.	APPD.
A	EXXXXXXXXXX	yangguifeng




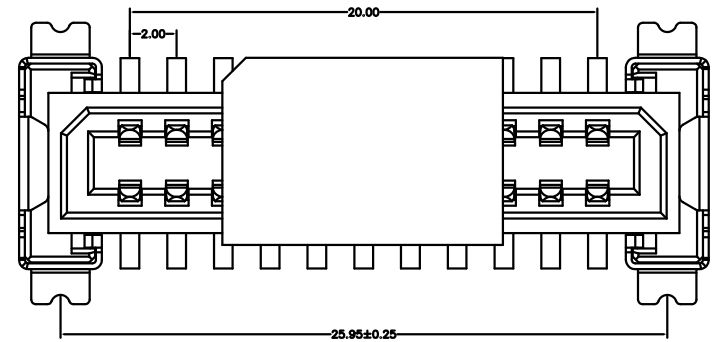


技术指标 (Technical Index) :

1. 工作温度 (Temperature range) : -25°C - 85°C .
2. 额定电压 (Rated voltage) : 250V DC/AC (rms)
3. 额定电流 (Rated current) : 5A AC, DC
4. 接触阻抗 (CONTACT Resistance) : $\leq 25\text{M}\Omega$
5. 耐压值 (Withstanding voltage) : 1500V AC/minute
6. 绝缘阻抗 (Insulation resistance) $\geq 1000\text{M}\Omega$

216104-1098-G63018

- G: 半金G/Fu" 1: 吸塑盒
- 6: LCP 3: 米黄色

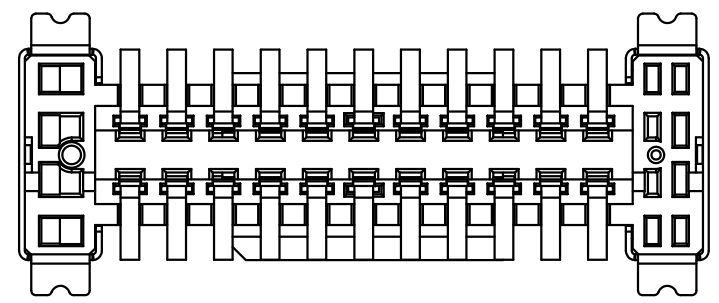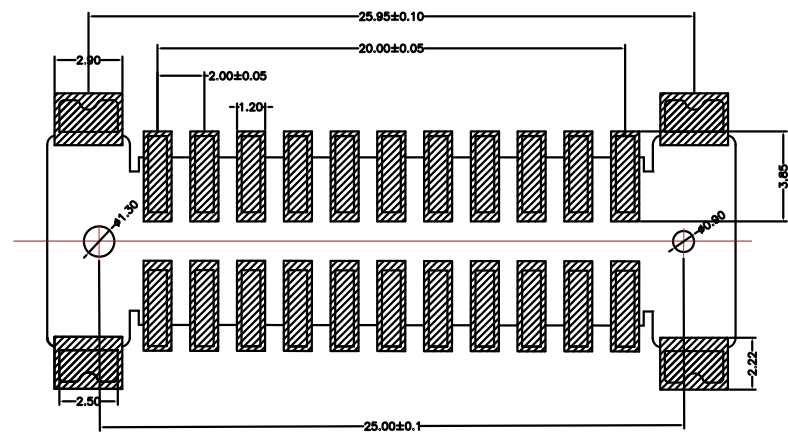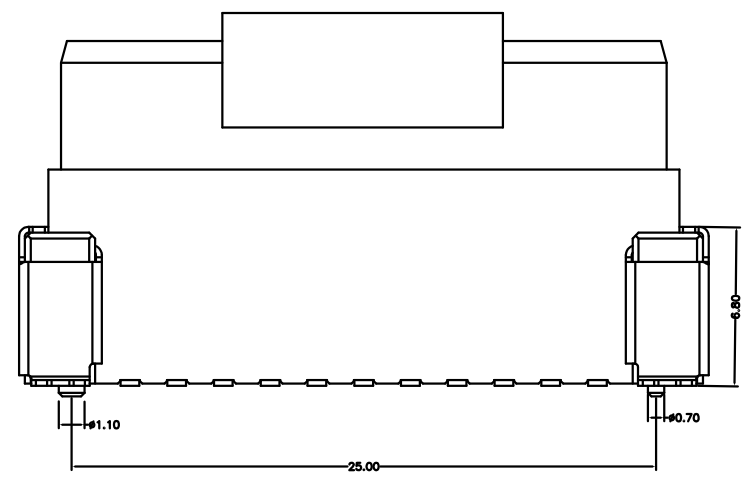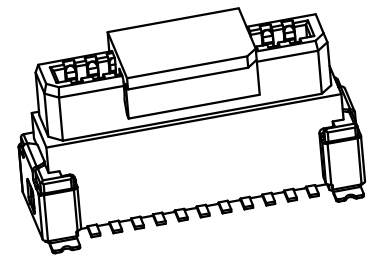

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.XXX ±0.10	.X' ±3'
.XX ±0.20	.XX' ±2'
.X ±0.30	

FLW 深圳市华联威电子科技有限公司
HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.

APPROVED		PART NAME:	板对板间距2.0公座			
CHECKED		PART No:	216104-1098-G63018			C
DRAWN	yangguifeng	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2021.12.01		mm	1:1	1 OF 1	A