


REV.	ECN.NO.	APPD.
A0	/	/

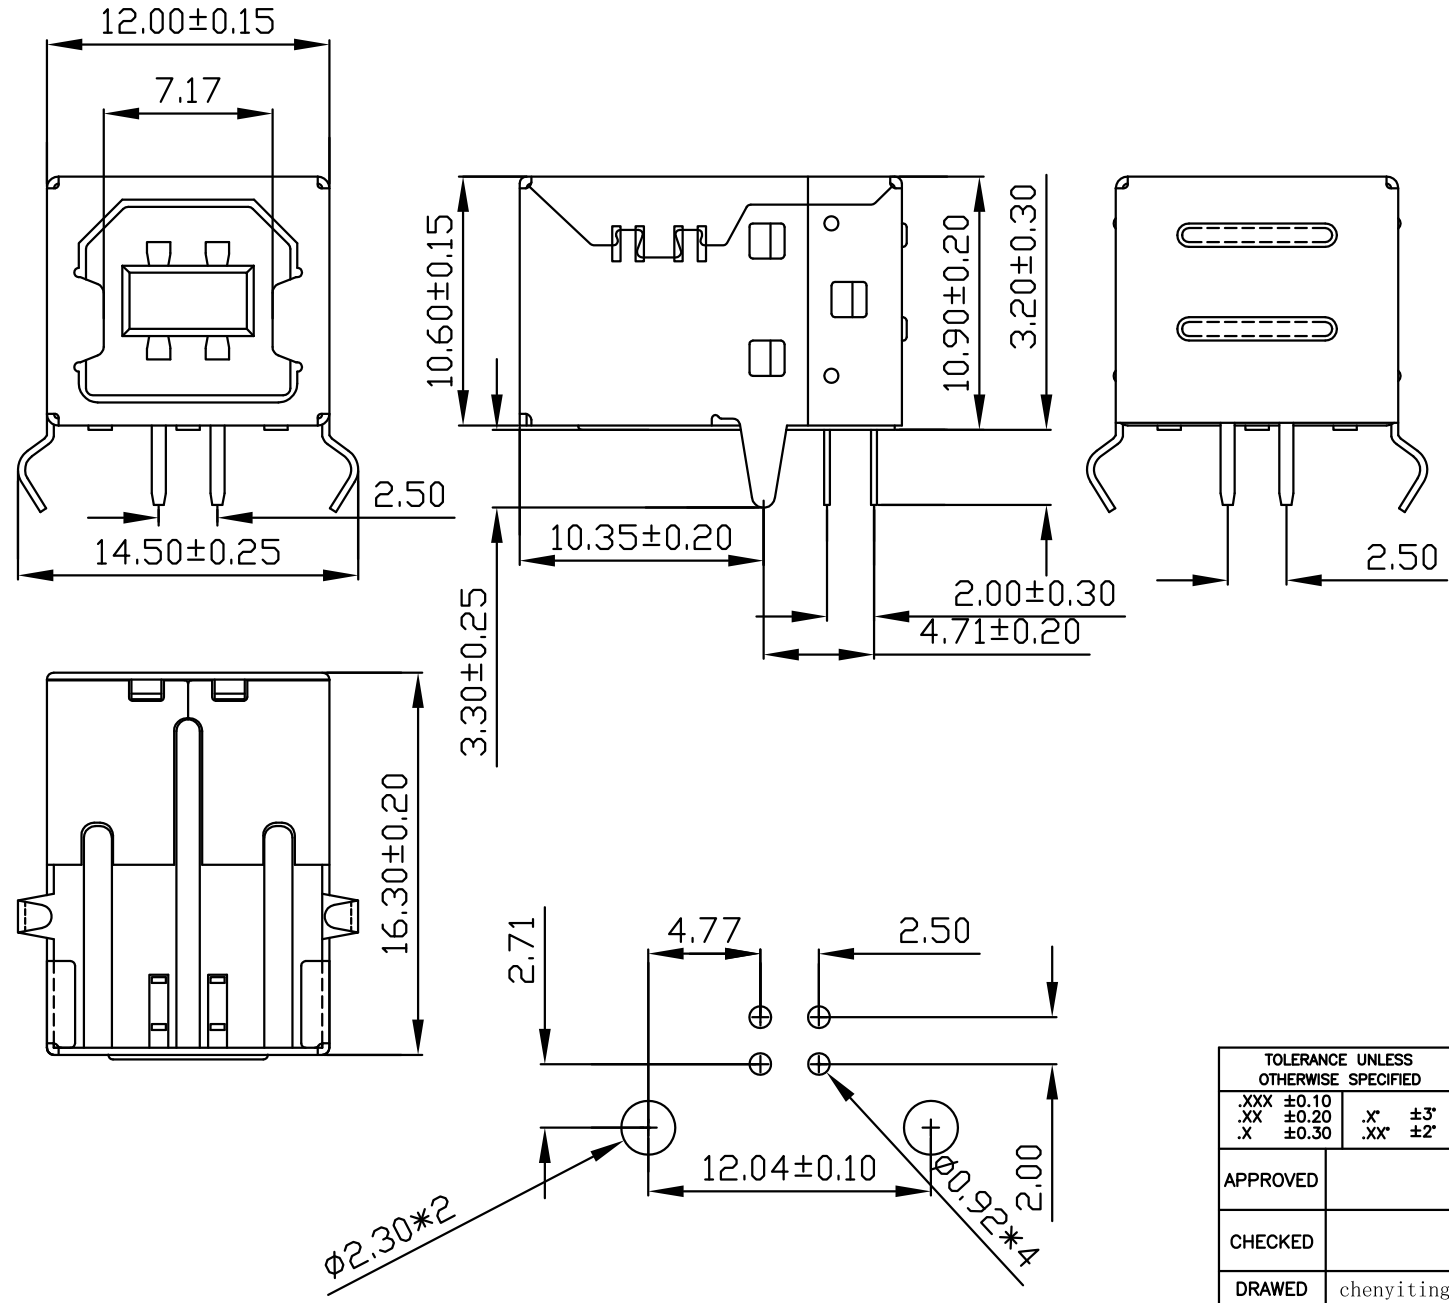

- NOTES:
- MATERIAL:
 - Housing:thermoplastic plastics
 - terminals:Copper Alloy
Gold plated in contact area:
Tin plated in termination
Nickel Plated overall
 - Shell:Steel&Copper Alloy
Nickel Plated overall
 - ELECTRICAL CHARACTERISTICS:
 - Rating Current :1.5 Ampere
 - Rating Voltage :30 V Max
 - Contact Resistance:30 Milli ohms
 - Insulation Resistance:1000 Mega ohms Min.
 - MECHANICAL CHARACTERISTICS:
 - Connector Mating force: 35N MAX(3.57Kgf)
 - Connector Unmating force:10N min(1.02Kgf)
 - Durability:1500Cycles.
 - ENVIRONMENT CHARACTERISTICS:
 - Operating temperature:-0°C to +50°C
 - Storage temperature:-20°C to +60°C

U241-0721-G22017

1:铁壳镀镍
G:半金G/Fu
1:吸塑盒
2:PBT
2:白色

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司					
.XXX ±0.10		.XX ±0.20		.X ±0.30		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.	
.XX ±0.20		.X ±0.30		.X' ±3'		.XX' ±2'	
APPROVED		PART NAME:	USB BF 90度				
CHECKED		PART No:	U241-0721-G22017			C	
DRAWN	chenyiting	PROJECTION:	UNIT:	SCALE	SHEET	REV.	
DATE	2022.03.20		mm	1:1	10F1	A0	