
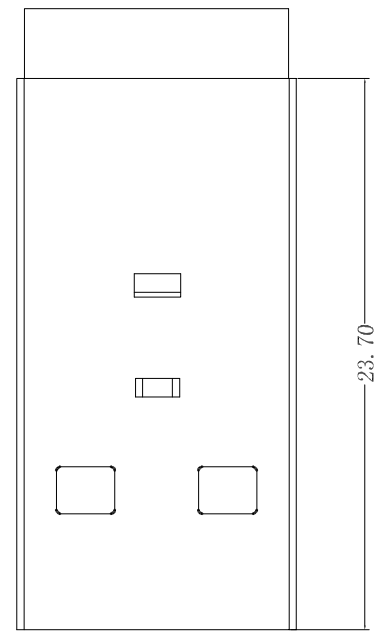
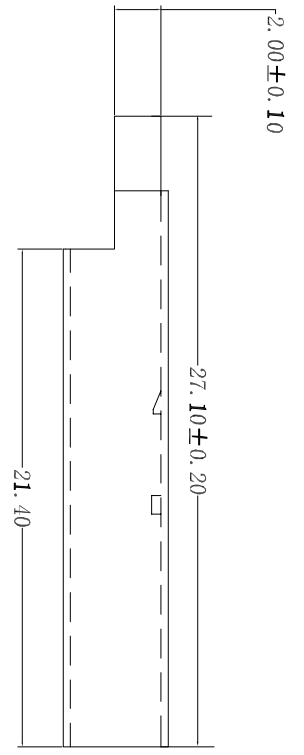



REV.	ECN.NO.	APPD.
A	/	/

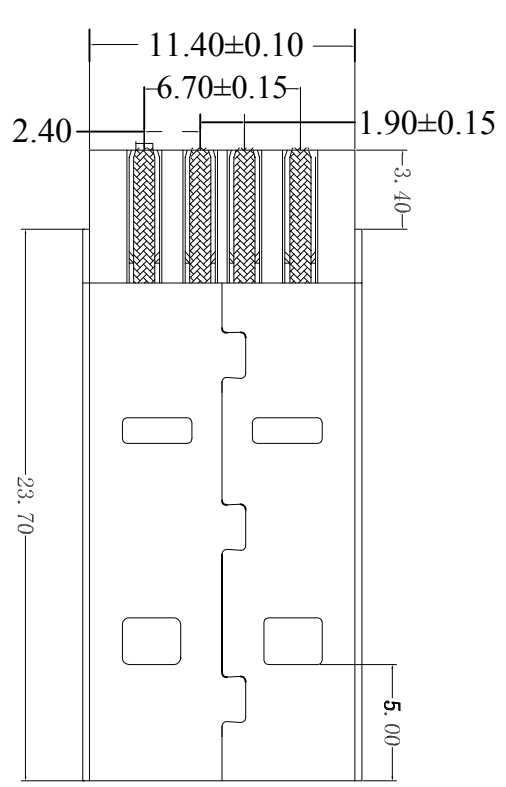

MECHANICAL
 Insulator material:
 PBT: glass-fibre reinforced
 UL 94V-0
 plastic: Brass
 Nut specifications:
 Shell: nickel (or tin, gold) plated
 Number of contact: 04
 Durability: 5000 cycles

ELECTRICAL
 Current rating: 5Amp
 Dielectric withstanding voltage: AC
 500Vmin (500V dc)
 500m max
 Contact resistance:
 25m max
 Working temperature: -50° c+
 150° c

- Notes:
 1. 产品外观不得有压伤, 缩水, 缺胶等不良。
 毛边不大于0.05mm。
 2. 产品组装后无不导电现象。
 3. 产品材质, 端子: C2680, T=0.20mm
 外壳: Spec, T=0.30mm
 胶芯: PBT
 4. 电镀规格: 端子镀半金锡1U' 外壳镀镍100U'. 24H

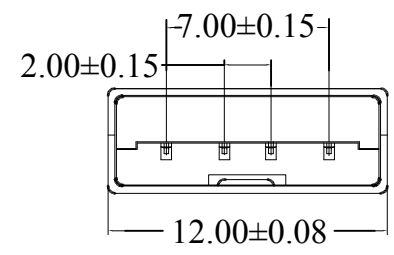

U218-102X-XXX0X7
 1: 铁壳镀镍
 1: 吸塑盒
 G: 半金G/Fu
 2: 白色
 2: PBT

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司				
.XXX ±0.10 .XX ±0.20 .X ±0.30		.X ±3' .XX ±2'		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.		
APPROVED		PART NAME:	USB AM 短体加长无脚			
CHECKED		PART No:	U218-1021-G22017		C	
DRAWN	weihong	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2021.7.23		mm	1:1	10F1	A