
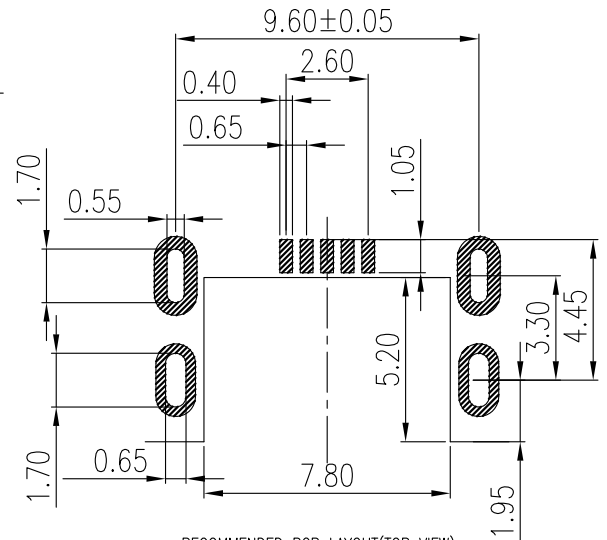



REV.	ECN.NO.	APPD.
A0	/	/

- NOTES:
- MATERIAL:
 - Housing: thermoplastic plastics,
 - terminals: Copper Alloy
Gold plated overall
 - Shell: Steel & Copper Alloy
Nickel/Tin Plated overall
 - ELECTRICAL CHARACTERISTICS:
 - Rating Current :1.5 Ampere
 - Rating Voltage :30 V Max
 - Contact Resistance:50 Milli ohms
 - Insulation Resistance:100 Mega ohms Min.
 - MECHANICAL CHARACTERISTICS:
 - Connector Mating force: 35N MAX
 - Connector Unmating force:7N min
 - ENVIRONMENT CHARACTERISTICS:
 - Operating temperature: -0°C to +50°C
 - Storage temperature: -20°C to +60°C

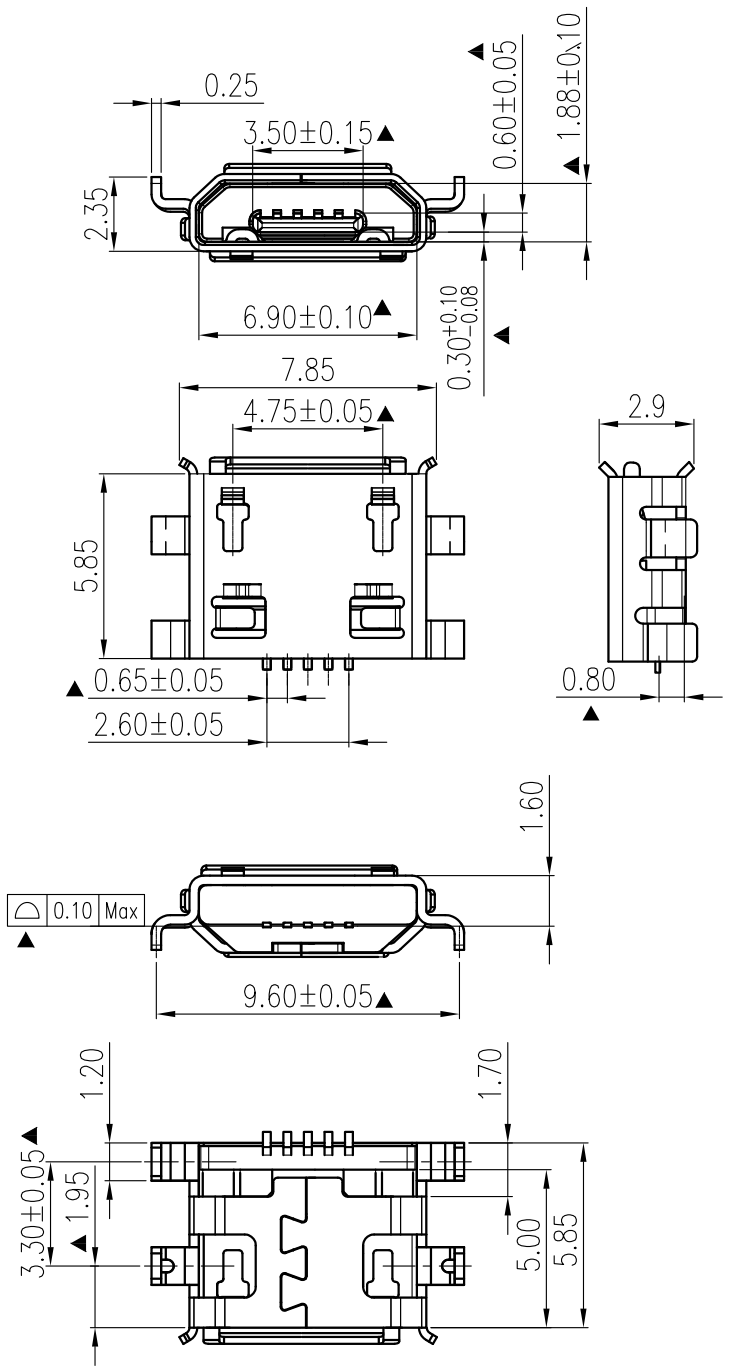

U448-1036-G21038

6: 铜壳镀锡
3: 冷封载带
G: 半金G/Fu
1: 黑色
2: PBT

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司			
.XXX ±0.10 .XX ±0.20 .X ±0.30		.X' ±3' .XX' ±2'		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.	
APPROVED		PART NAME:	MICRO 5P/F B型插脚沉板0.8 有卷边 H款		
CHECKED		PART No:	U448-1036-G21038	C	
DRAWN	chenyting	PROJECTION:	UNIT:	SCALE	SHEET
DATE	2022.10.09		mm	1:1	10F1
					REV. A0