

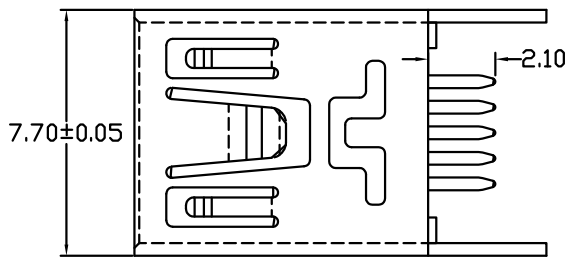


| | | |
|------|---------|-------|
| REV. | ECN.NO. | APPD. |
| A0 | / | / |

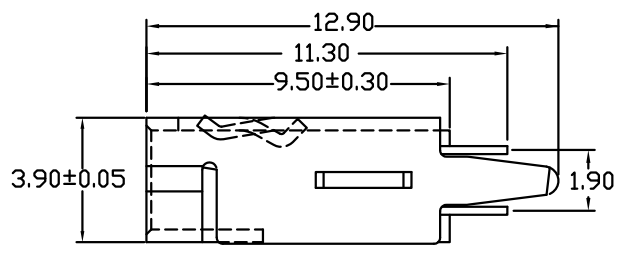


NOTES:

- MATERIAL:
 - Housing: thermoplastic plastics,
 - terminals: Copper Alloy
Gold plated in contact area:
Tin 40u"min plated in termination
Nickel Plated overall
 - Shell: Steel & Copper Alloy
Nickel/Tin Plated overall
- ELECTRICAL CHARACTERISTICS:
 - Rating Current : 1.5 Ampere
 - Rating Voltage : 30 V Max
 - Contact Resistance: 50 Milli ohms
 - Insulation Resistance: 100 Mega ohms Min.
- MECHANICAL CHARACTERISTICS:
 - Connector Mating force: 35N MAX
 - Connector Unmating force: 7N min
- ENVIRONMENT CHARACTERISTICS:
 - Operating temperature: -0°C to +50°C
 - Storage temperature: -20°C to +60°C

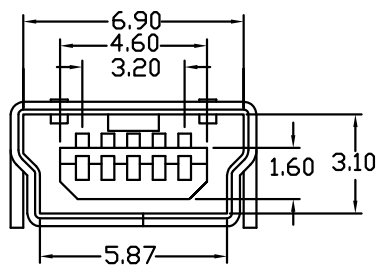


U143-0515-G61018

- 5: 铜壳镀镍
- G: 半金G/Fu"
- 6: LCP
- 1: 吸塑盒
- 1: 黑色

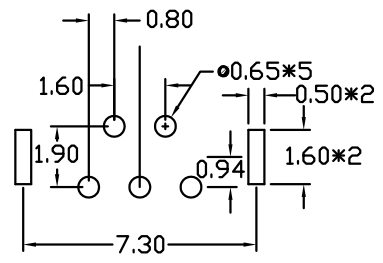

RECO MME NDED PCB LA1YOUT

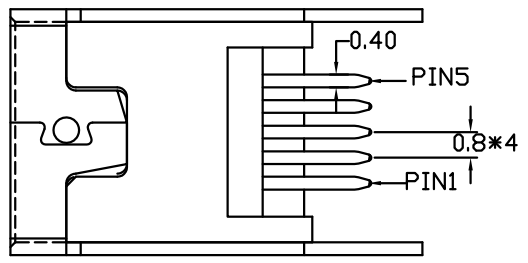

| | | | | | | |
|--------------------------------------|-----------|---------------------------|---|-------|-------|------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | FLW 深圳市华联威电子科技有限公司 | | | | |
| .XXX ±0.10 | .XX ±0.20 | .X ±0.30 | HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD. | | | |
| | .X* ±3' | .XX* ±2' | | | | |
| APPROVED | | PART NAME: | USB MINI 5/F 180度 | | | |
| CHECKED | | PART No: | U143-0515-G61018 | C | | |
| DRAWN | weihong | PROJECTION: | UNIT: | SCALE | SHEET | REV. |
| DATE | 2021.9.3 | | mm | 1:1 | 10F1 | A0 |