




REV.	ECN.NO.	APPD.
A	/	/




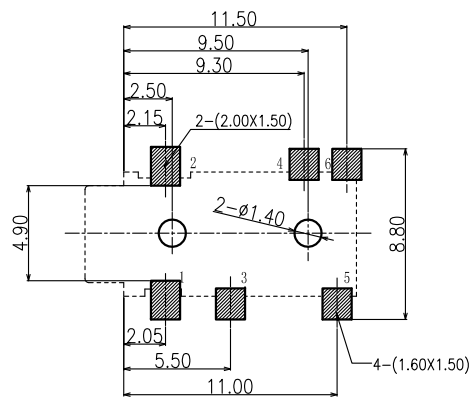


3D VIEW




P.C.B LAYOUT
TOP VIEW

1. CURRENT RATING : 1.0 AMP. MAX.
2. DIELECTRIC WITHSTANDING : AC 500V/min R.M.S.
3. INSULATION RESISTANCE : 100MΩ min. AT 100V DC.
4. CONTACT RESISTANCE : 50mΩ MAX.
5. OPERATING TEMPERATURE : -25° C TO +85° C.
6. DURABILITY : 1500 CYCLES.
7. MATING FORCE : 3kgs MAX
8. UNMATING FORCE : 0.3~3.0kgs
9. MAX PROCESSING TEMPERATURE :
60 SECONDS IN 230° C AND 10 SECONDS IN 260° C

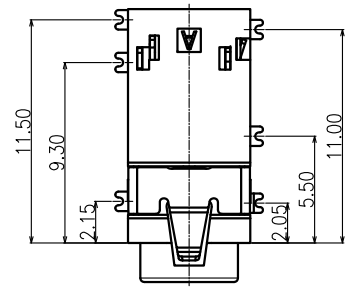

JK1-203-G217
 G: 半金G/Fu" ——— 1: 黑色
 2: PBT

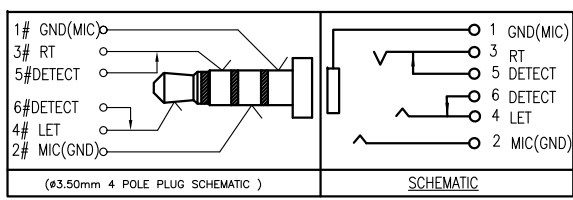

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司			
.XXX ±0.10	.XX ±0.20	.X ±0.30	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.		
APPROVED		PART NAME:		耳机 JACK 6脚贴片高度4.5	
CHECKED		PART No:		JK1-203-G217	C
DRAWN		weihong	PROJECTION:	UNIT:	SCALE
DATE		2021.11.06		mm	1:1
				SHEET	REV.
				10F1	A