

9

8

7

6

5




4

3

2

1

REV.	ECN.NO.	APPD.
A	/	/

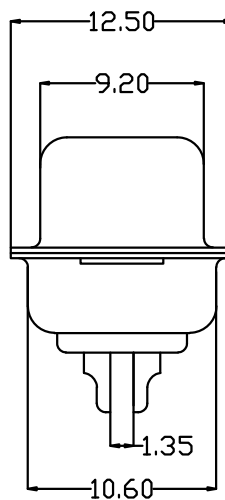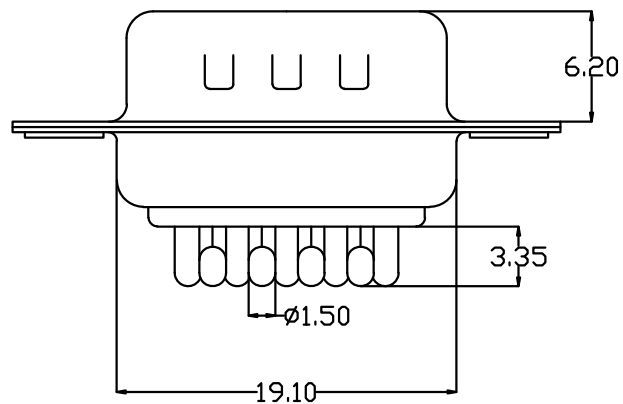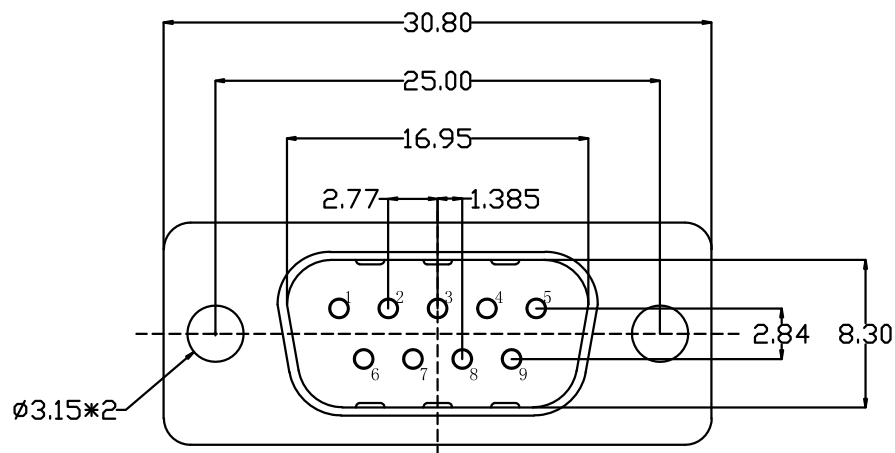

1.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:1000MΩ Min.
- 2.3 Dielectric Strength:500V AC PER MIN
- 2.4 Operation Temperature:-55C~+105C
- 2.5 Contact Resistance:30mΩ Max

DS412-4211-G2B7

G. 半金G/FU^z B. 蓝色

2. PBT

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司 HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.			
.XXX ±0.10	.X' ±3'	PART NAME:		D-SUB DB 9公焊线光孔	
.XX ±0.20	.XX' ±2'	CHECKED	PART No:	DS412-4211-G2B7	C
.X ±0.30		DRAWN	PROJECTION:	UNIT:	SCALE
		DATE		mm	1:1
				SHEET	REV.
				10F1	A

9

8

7

6

5

4

3

2

1