


REV.	ECN.NO.	APPD.
A	/	/


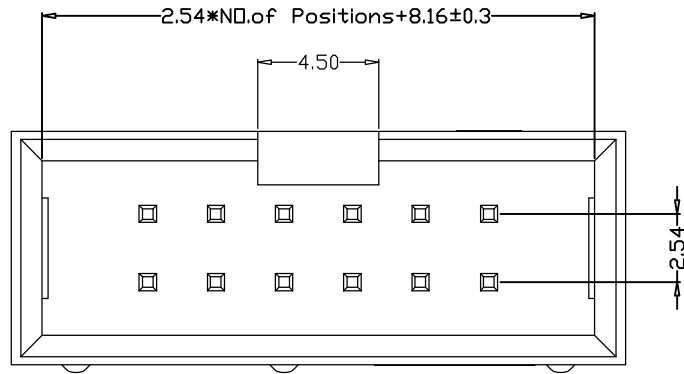


**材质**

塑胶 : PA6T/LCP-UL94 V-0  
 端子 : 黄铜  
 接触电镀: 镀金 Gold flash


**产品参数**

额定电流 : 3A  
 耐电压值: ≤550V AC  
 工作温度: -40° C to +105° C  
 接触电阻: ≤20mΩ  
 绝缘电阻: ≥1000MΩ  
 最大处理温度: 230° C-265° C

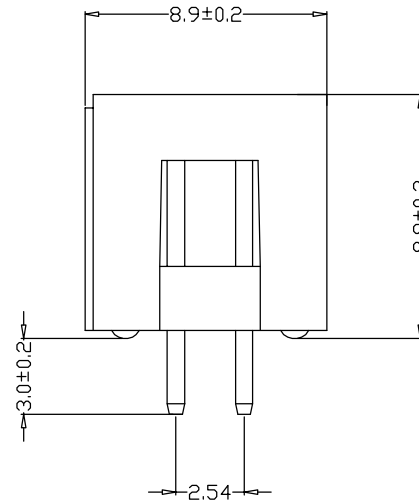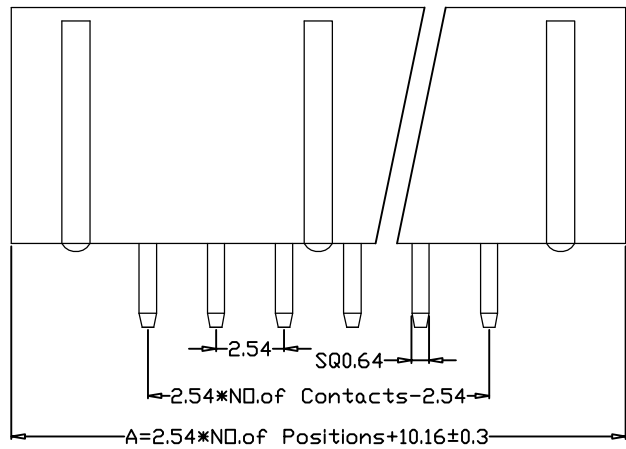

216104-1046-G31018

- 1: 吸塑盘
- 2: 吸塑管
- 5: 袋装
- 7: 管装

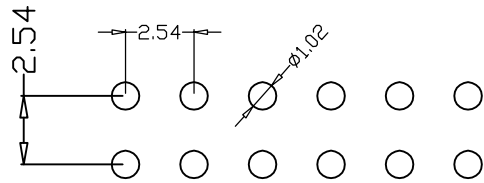

P. C. B LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>FLW</b> 深圳市华联威电子科技有限公司				
.XXX ±0.10 .XX ±0.20 .X ±0.30		.X' ±3' .XX' ±2'		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.		
APPROVED		PART NAME:	2.54筒牛 直插5PIN			
CHECKED		PART No:	216104-1046-G31018			C
DRAWN	weihong	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2021.9.23		mm	1:1	10F1	A