

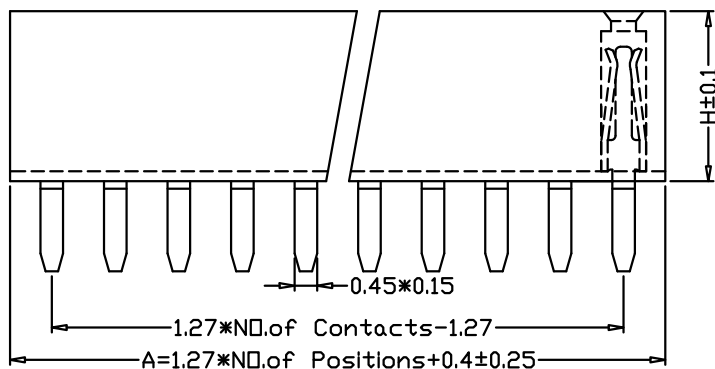


| | | |
|------|---------|-------|
| REV. | ECN.NO. | APPD. |
| A | / | / |


技术指标 (Technical Index) :

1. 工作温度 (Temperature range) : -25° C-85° C.
2. 额定电压 (Rated voltage) : 250V DC/AC (rms)
3. 额定电流 (Rated current) : 5A AC, DC
4. 接触阻抗 (CONTACT Resistance) : $\leq 25M\Omega$
5. 耐压值 (Withstanding voltage) : 1500V AC/minute
6. 绝缘阻抗 (Insulation resistance) $\geq 1000M\Omega$

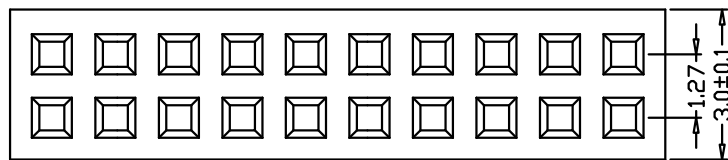

216104-1034-G31078

7: 管装

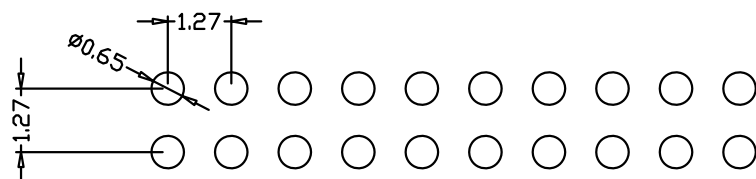

P. C. B LAYOUT

| | | | | | |
|--------------------------------------|-----------|---------------------------|---|-------|--------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | FLW 深圳市华联威电子科技有限公司 | | | |
| .XXX ±0.10 | .XX ±0.20 | .X ±0.30 | HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD. | | |
| .X' ±3' | .XX' ±2' | | | | |
| APPROVED | | PART NAME: | 1.27间距排母 双排 直插3PIN | | |
| CHECKED | | PART No: | 216104-1034-G31078 | C | |
| DRAWN | weihong | PROJECTION: | UNIT: | SCALE | SHEET |
| DATE | 2021.9.23 | | mm | 1:1 | 10F1 |
| | | | | | REV. A |

| | | |
|------------|---------|-----------------|
| A | H | PC |
| 2*2P-2*50P | 3.4 4.3 | 1.5 1.8 2.4 2.8 |