
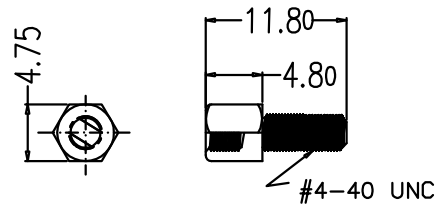
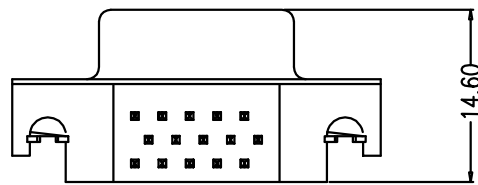


REV.	ECN.NO.	APPD.
A0	/	/


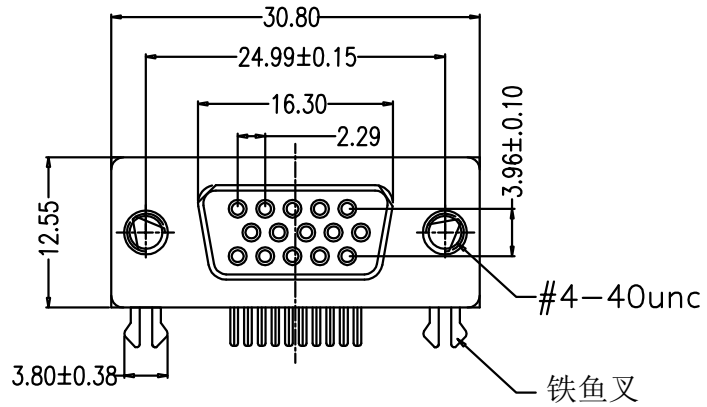


1.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:1000MΩ Min.
- 2.3 Dielectric Strength:500V AC PER MIN
- 2.4 Operation Temperature:°55C~+105C
- 2.5 Contact Resistance:30mΩ Max

DS412-5610-XXX8

G. 半金G/F" H. 蓝色  
2. PBT

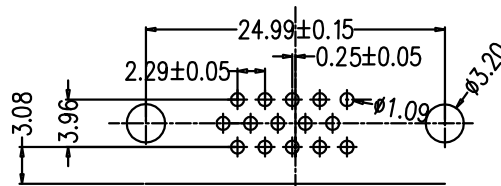

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>FLW</b> 深圳市华联威电子科技有限公司			
.XXX ±0.10		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.			
.XX ±0.20		.X ±3'			
.X ±0.30		.XX' ±2'			
APPROVED		PART NAME:	D-SUB HDR 15P/F 卧式3.08		
CHECKED		PART No:	DS412-5610-G2H8	C	
DRAWN	weihong	PROJECTION:	UNIT:	SCALE:	SHEET:
DATE	2021.10.6		mm	1:1	10F1
					REV. A0