


REV.	ECN.NO.	APPD.
A	/	/

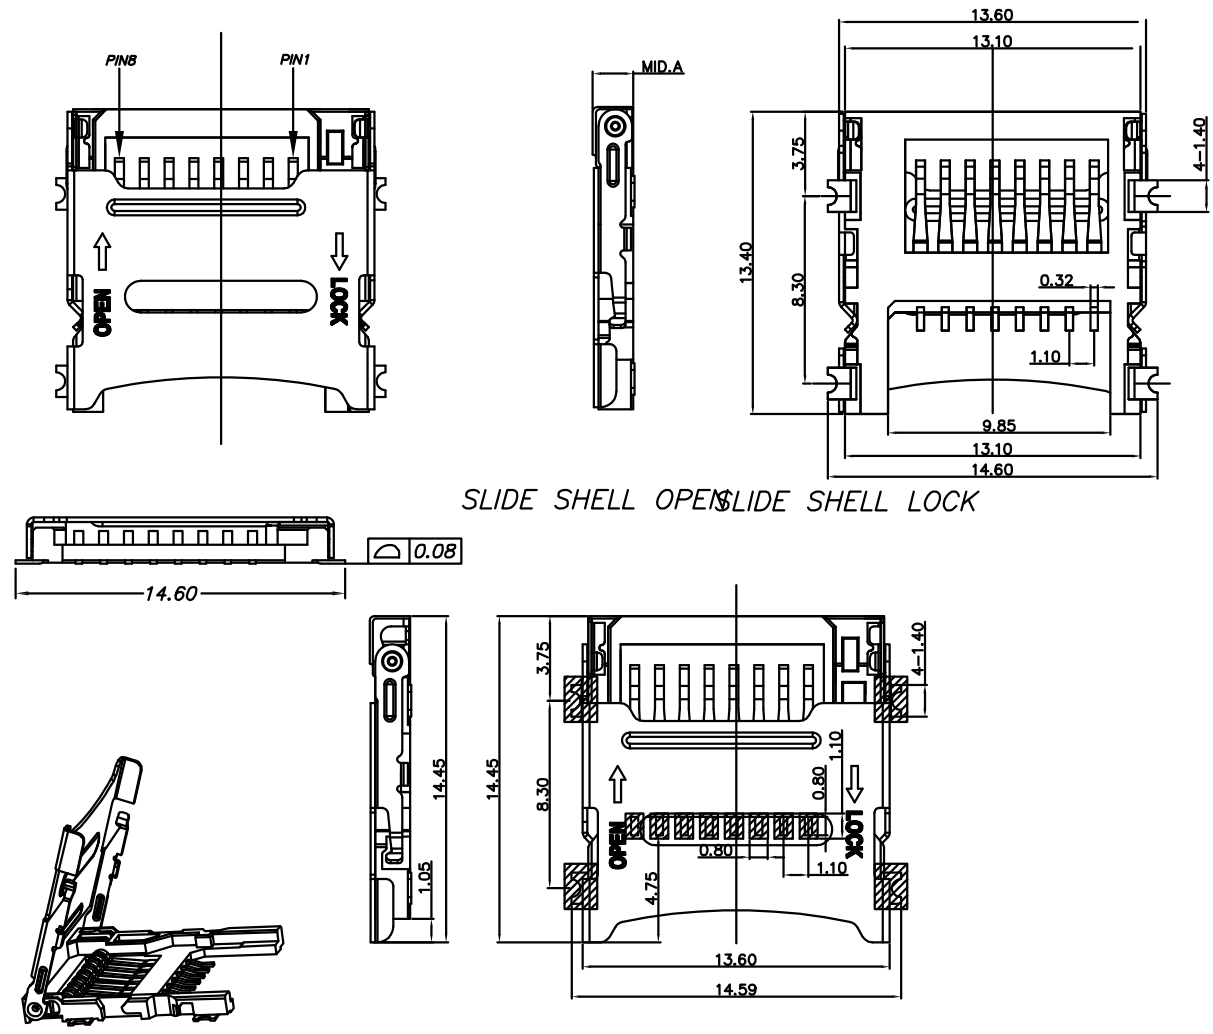

SLIDE SHELL OPEN/SLIDE SHELL LOCK

- *Electrical Characteristics:
 Contact Current Rating:0.5 Amperes.
 Dielectric Withstanding Voltage:AC500V r.m.s.
 Insulation Resistance:1000 MΩ Minimum.
 Contact Resistance:100 mΩ Maximum.
- *Environmental:
 Operating Temperature:-25°C~+90°C.
- *Environmental:
 Mating Cycles:5000~10,000 Insertions.
- *Mechanical Characteristics:
 Card Push Insertion/Out Force:1.4kgf. MAX
 Contact Separation Force:0.20kgf Minimum.
- *Material:
 Insulator:HI-Temp Plastic UL 94V-0 Rated.
 Contact:Copper Alloy(t=0.15mm).
 Shell:Stainless Steel(t=0.20mm).
 Spring:SWP.

SD5211-130-G68
 G. 半金G/Fu” 6. LCP黑色

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司				
.XXX ±0.10		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.				
.XX ±0.20		.X ±3'				
.X ±0.30		.XX ±2'				
APPROVED		PART NAME:	SD 卡座高度1.8掀盖式8PIN			
CHECKED		PART No:	SD5211-130-G68			C
DRAWN	yangguifeng	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2021.10.29		mm	1:1	10F1	A