







REV.	ECN.NO.	APPD.
A	XXXXXXXXXX	yangguifeng

技术指标 (Technical Index) :

1. 工作温度 (Temperature range) : -25°C - 85°C .
2. 额定电压 (Rated voltage) : 250V DC/AC (rms)
3. 额定电流 (Rated current) : 5A AC, DC
4. 接触阻抗 (CONTACT Resistance) : $\leq 25\text{M}\Omega$
5. 耐压值 (Withstanding voltage) : 1500V AC/minute
6. 绝缘阻抗 (Insulation resistance) $\geq 1000\text{M}\Omega$

216104-1099-G63018

G: 半金G/Fu
6: LCP
1: 吸塑盒
3: 米黄色

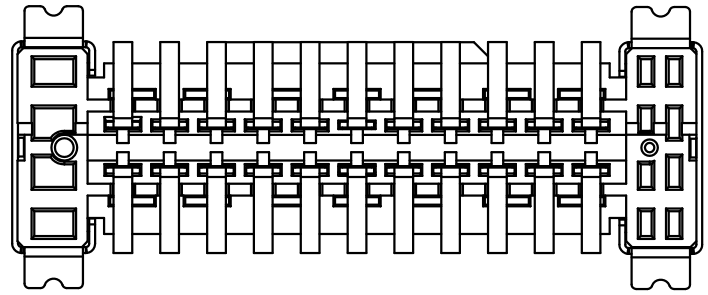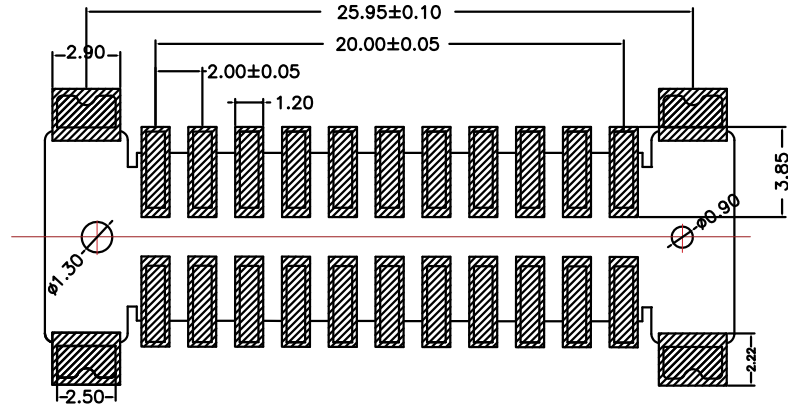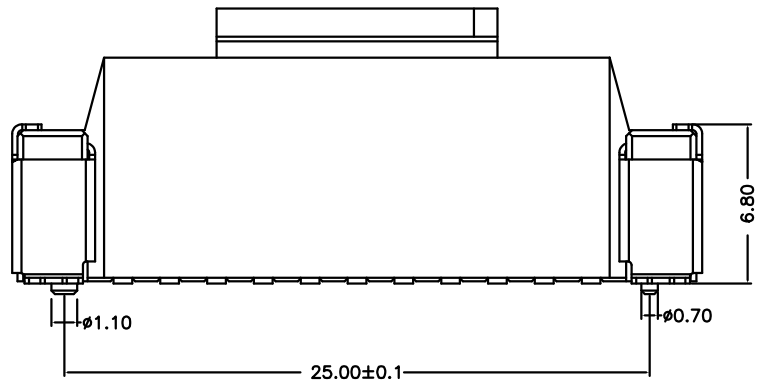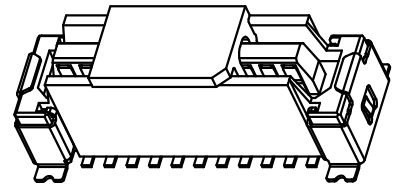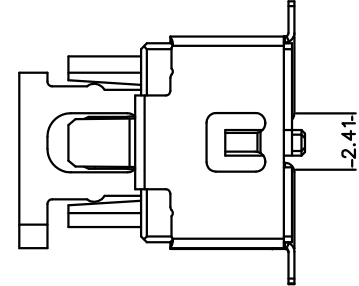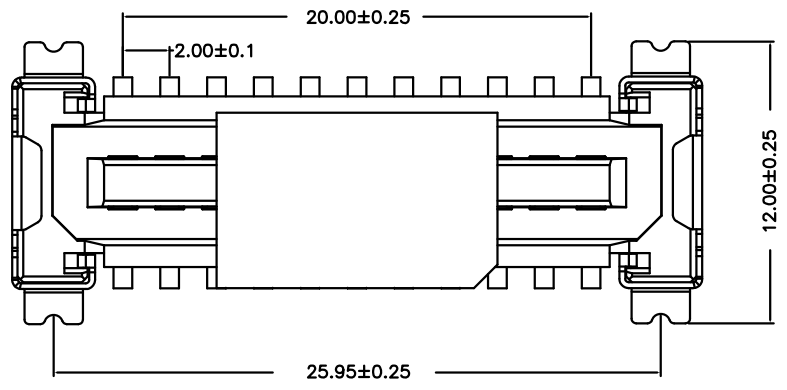

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司				
		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.				
.XXX ±0.10	.X' ±3'	PART NAME:		板对板间距2.0母座		
.XX ±0.20	.XX' ±2'	PART No:		216104-1099-G63018	C	
.X ±0.30		DRAWN	yangguifeng	PROJECTION:	UNIT:	SCALE
DATE	2021.12.01			mm	1:1	SHEET
				1 OF 1	REV.	
				A		