


REV.	ECN.NO.	APPD.
A	EXXXXXXXXXX	yangguifeng


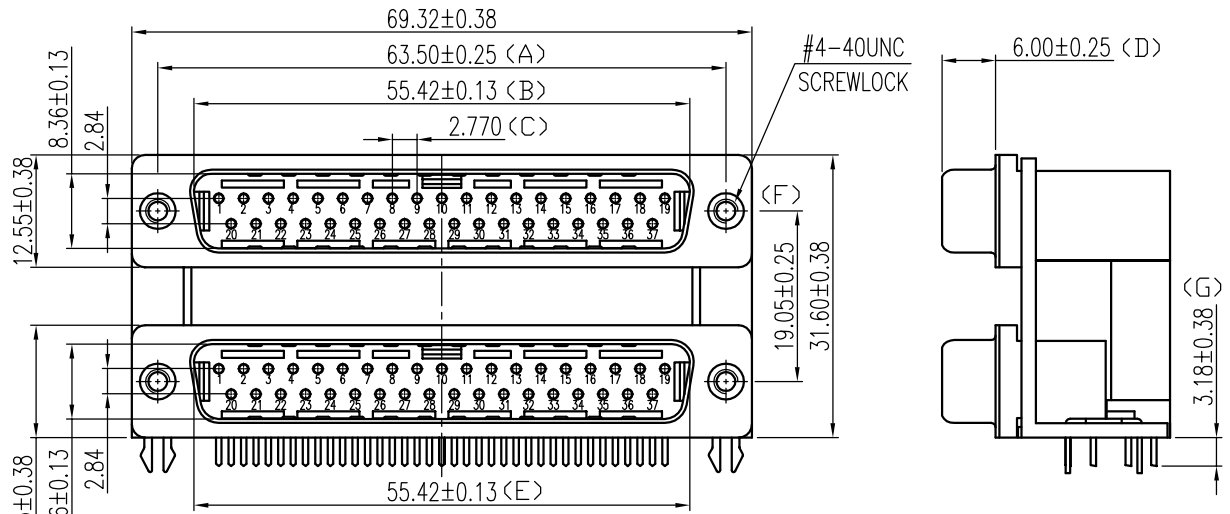


1.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:1000M Min.
- 2.3 Dielectric Strength:500V AC PER MIN
- 2.4 Operation Temperature:-55C~+105C
- 2.5 Contact Resistance:30m Max

DS114-0231-G217

1:铁壳镀镍  
 1:黑色  
 G:半金G/Fu"  
 2:PBT

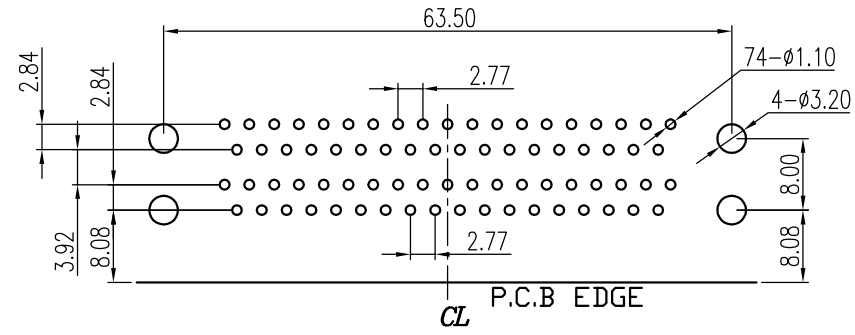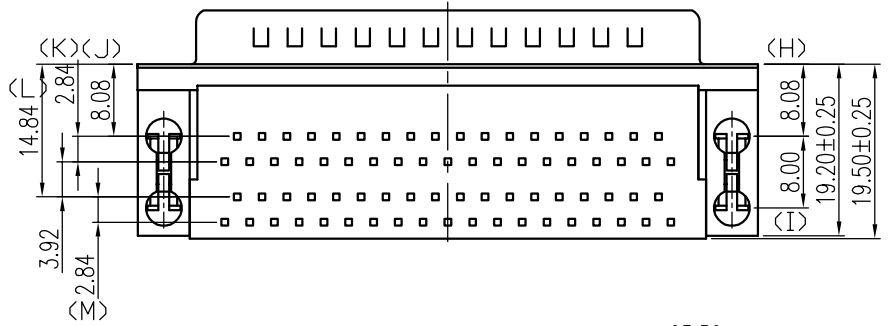

RECOMMENDED P.C.B LAYOUT  
 INSPECTION DIMENSION:(A)~(M)

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>HLW</b> 深圳市华联威电子科技有限公司				
.XXX ±0.10		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.				
.XX ±0.20		.X' ±3'				
.X ±0.30		.XX' ±2'				
APPROVED		PART NAME:	DR37公双层铆合卧式			
CHECKED		PART No:	DS114-0231-G217	C		A
DRAWN	yangguifeng	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2021.12.01		mm	1:1	1 OF 1	A