

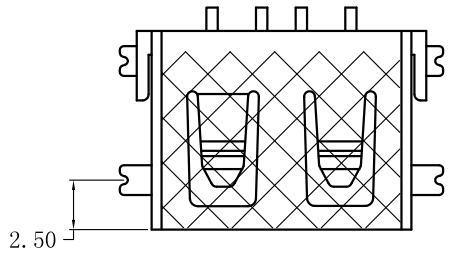
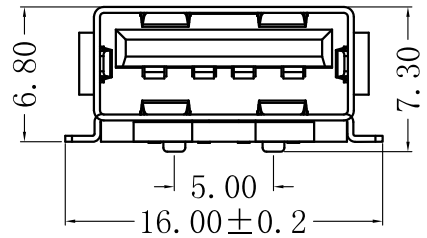


REV.	ECN.NO.	APPD.
A	EXXXXXXXXXXX	chenyiting

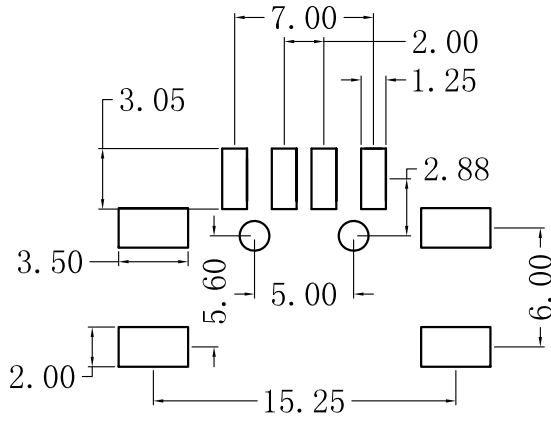


- NOTES:
- MATERIAL:
    - Housing:thermoplastic plastics
    - terminals:Copper Alloy  
Gold plated in contact area:  
Tin plated in termination  
Nickel Plated overall
    - Shell:Steel&Copper Alloy  
Nickel Plated overall
  - ELECTRICAL CHARACTERISTICS:
    - Rating Current :1.5 Ampere
    - Rating Voltage :30 V Max
    - Contact Resistance:30 Milli ohms
    - Insulation Resistance:1000 Mega ohms Min.
  - MECHANICAL CHARACTERISTICS:
    - Connector Mating force: 35N MAX(3.57Kgf)
    - Connector Unmating force:10N min(1.02Kgf)
    - Durability:1500Cycles.
  - ENVIRONMENT CHARACTERISTICS:
    - Operating temperature:-0°C to +50°C
    - Storage temperature:-20°C to +60°C

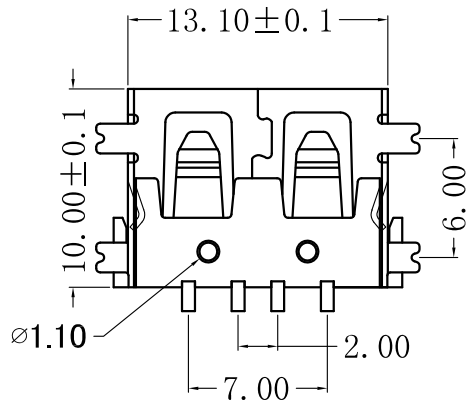

RECOMMENDED P. C. B LAYOUT

U224-3231-G61068

1: 铁壳镀镍  
G: 半金G/Fu  
6: LCP  
6: 载带+贴麦拉  
1: 黑色



TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>HLW</b> 深圳市华联威电子科技有限公司					
.XXX ±0.10		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.					
.XX ±0.20		.X' ±3'		PART NAME:		AF 短体10.0 全贴片H6.8 无卷边	
.X ±0.30		.XX' ±2'		CHECKED		PART No: U224-3231-G61068	
APPROVED		chenyiting		DRAWN		C	
DATE		2022.04.04		PROJECTION:		UNIT: mm	
				SCALE		SHEET	
				1:1		1 OF 1	
				REV.		A	
				A			